
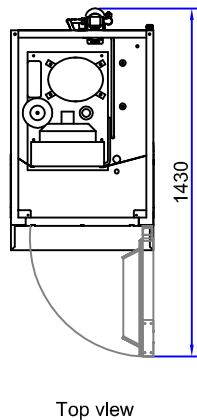
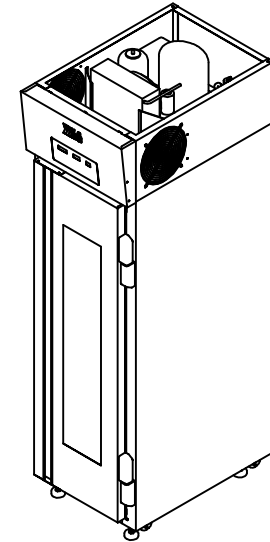
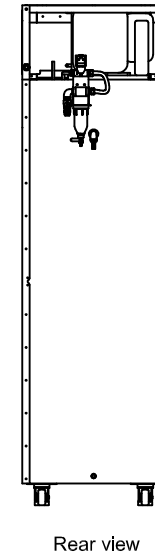
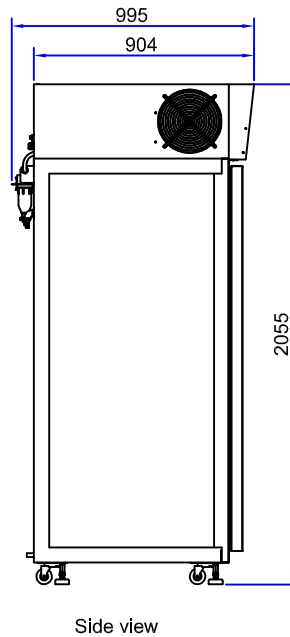


# Reach-in Retarder Proofer, 18-trays K12-RE64D18

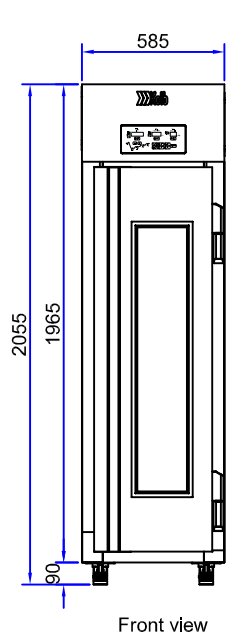

- D External Dim. of chamber and compressor unit 585(W)x995(D)x2055(H) mm
- Total Tray capacity (per Proofer) 18 levels 18pcs 600x400 mm
- Tray levels space 72 mm
- E Voltage 220-230V~,50/60Hz,PE
- Optional voltage 240V~,50/60Hz,PE (Specify on order)
- N Total power consumption 1.1 kW ( 5 A)
- T Total weight 156 kg
- W Connection point of water supply 1/2"

Signature: \_\_\_\_\_  
Date: \_\_\_\_\_

Unsigned Tolerance According to DIN ISO 2768-1							
Dimension	0.3 To 6	6 To 30	30 To 120	120 To 400	Radius 0.5 To 3	Radius 3 To 6	mm
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	mm
<b>Kolb Huizhou Ltd.</b>					Tel: +86 (0)752 6111 203 ext. 219		
					Mail: info@kolbcn.com		
					Website: www.kolbcn.com		
Tolerance		Customer Title: Retarder Proofer			Material: SS304		
X.±	X.°	Kolb Item Number:				Version: 01	
.X±	.X°	Kolb Item Name: Reach-in Retarder Proofer, 18-trays					
.XX±	.XX°						
		Weight	Thickness	Item Number	Page		
				K12-RE64D18	1/1		

1	Approve		Check		Draft	Bell	Unit	mm
Quantity	Date		Date		Date	15.01.2019	Scale	1:1

